

# WE GOT YOU COVERED!

## PRODUCT FEATURES

- 01** Environment friendly and energy saving
- 02** Color Lasting
- 03** Load Bearing
- 04** Sound Absorption and Heat Insulation
- 05** Stable Volume
- 06** Corrosion Resistance
- 07** Good Water Resistance
- 08** Impact Resistance and Low Temperature Resistance
- 09** Light Weight
- 10** Difficult to Burned




## INSTALLATION GUIDELINES FOR JIELIROOF


- Recommended Purlin distance from the following UPVC Roof width.

Type	Small Wave 720	T940
Purlin Distance	≤ 800 mm	≤ 1200 mm
Covered Area	630mm	880mm

- One wave overlap for installing lateral direction.
- 20cm - 25cm gap overlap for installing on lengthways direction.
- If the roof slope is less than 20 degrees, overlapping should be at least 40cm.
- Screws can only be install on the wave above the purlin. If it is installed without purlin, the sheet might break.
- Pre-drill the roof sheet (not the purlin) before fixing the screw. If the screw's diameter is 6.3mm, you need to make a hole of 7.0mm or 8.0mm.
- Install the screws on 1st, 3rd and 5th wave. (1st and 6th wave will be overlap.)
- Screws cannot be fixed too tight or it will bend and crack.
- Screws cannot be fixed to loose or the roof will move and penetrate.
- Screws cannot be fixed to near the edge or else the roof sheet will be broken.
- We recommend 4 sets of screws per square meter.
- If installed in windy area, overlapping of two waves at lateral direction and on at least 40cm, 6 sets of screws per square meter should be installed.

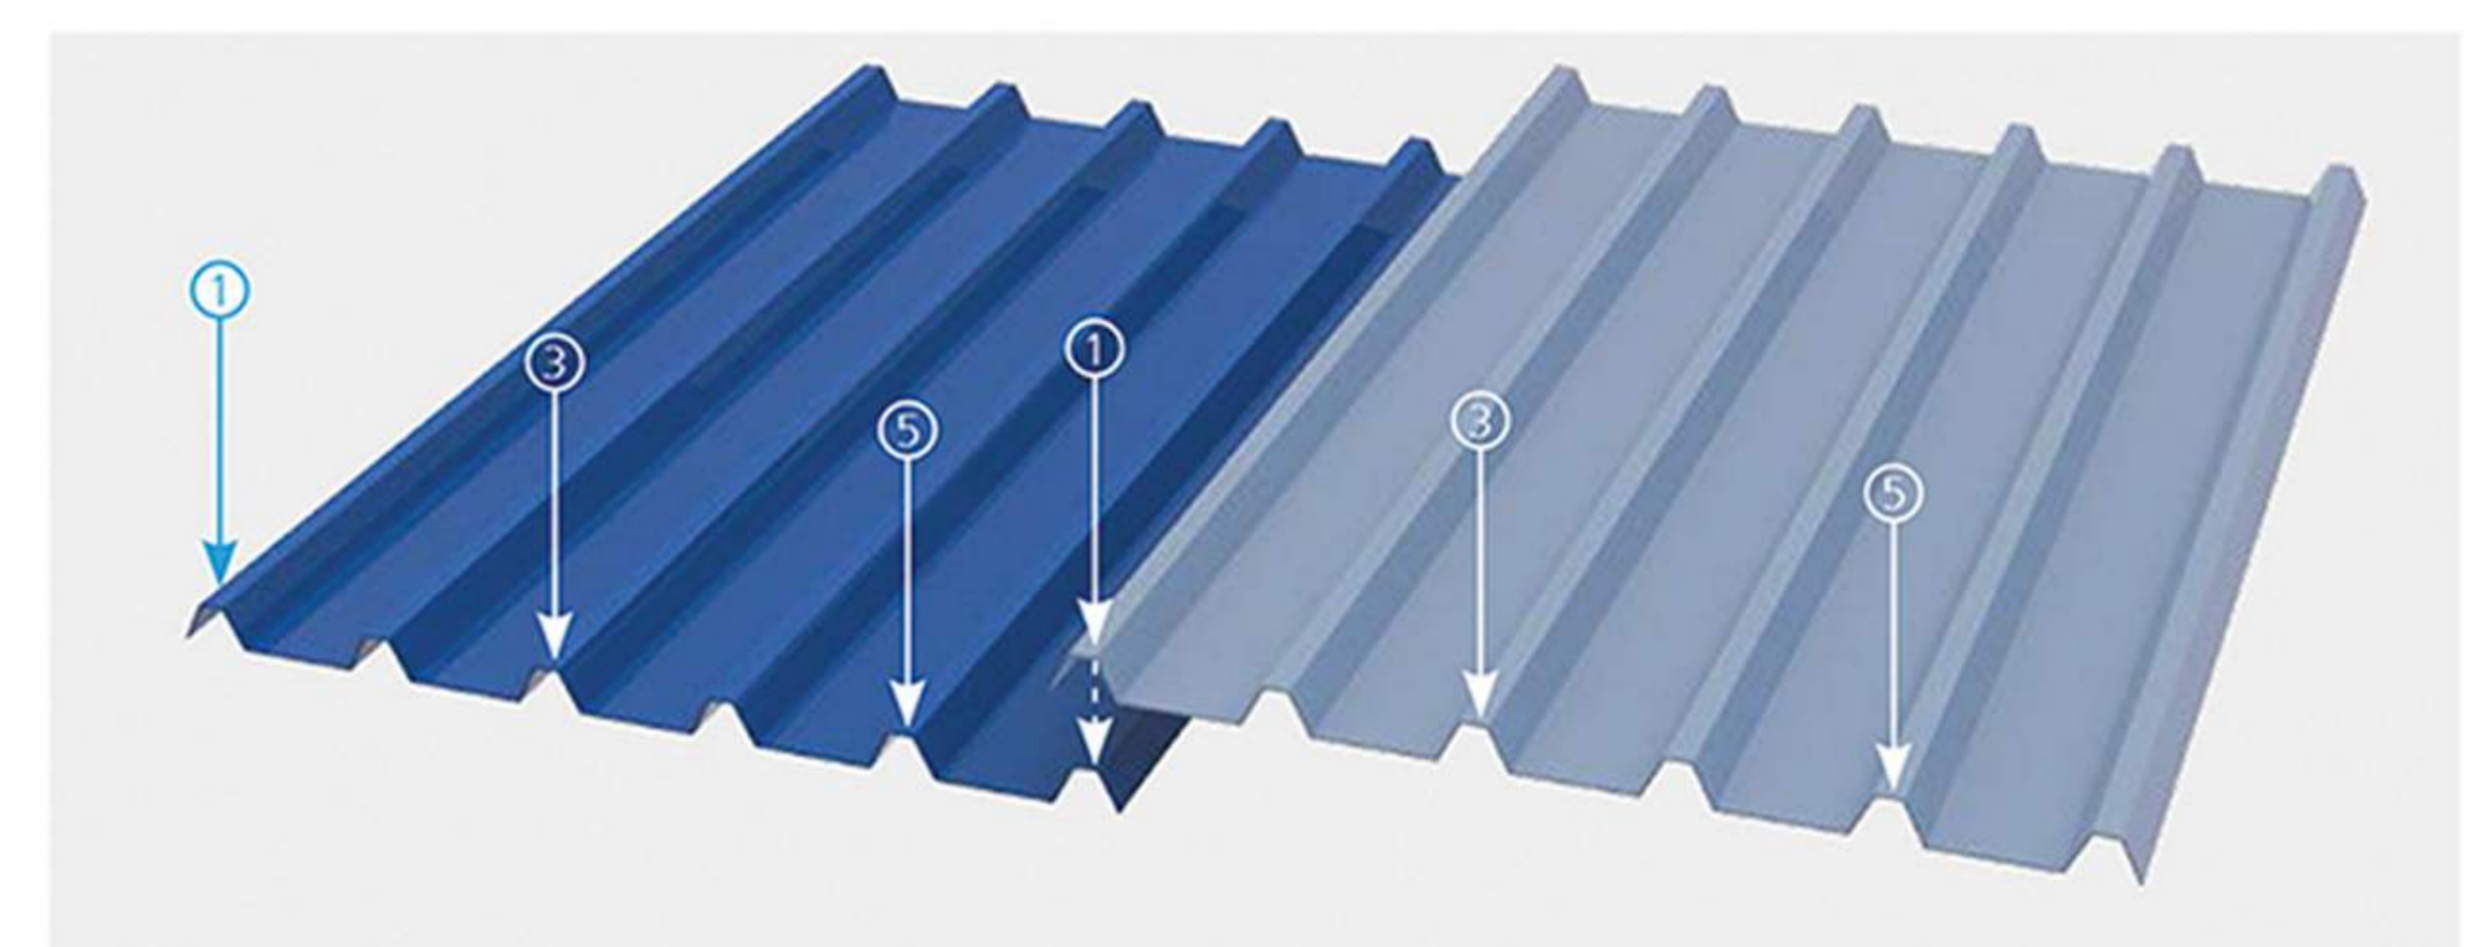

Pre-drill:

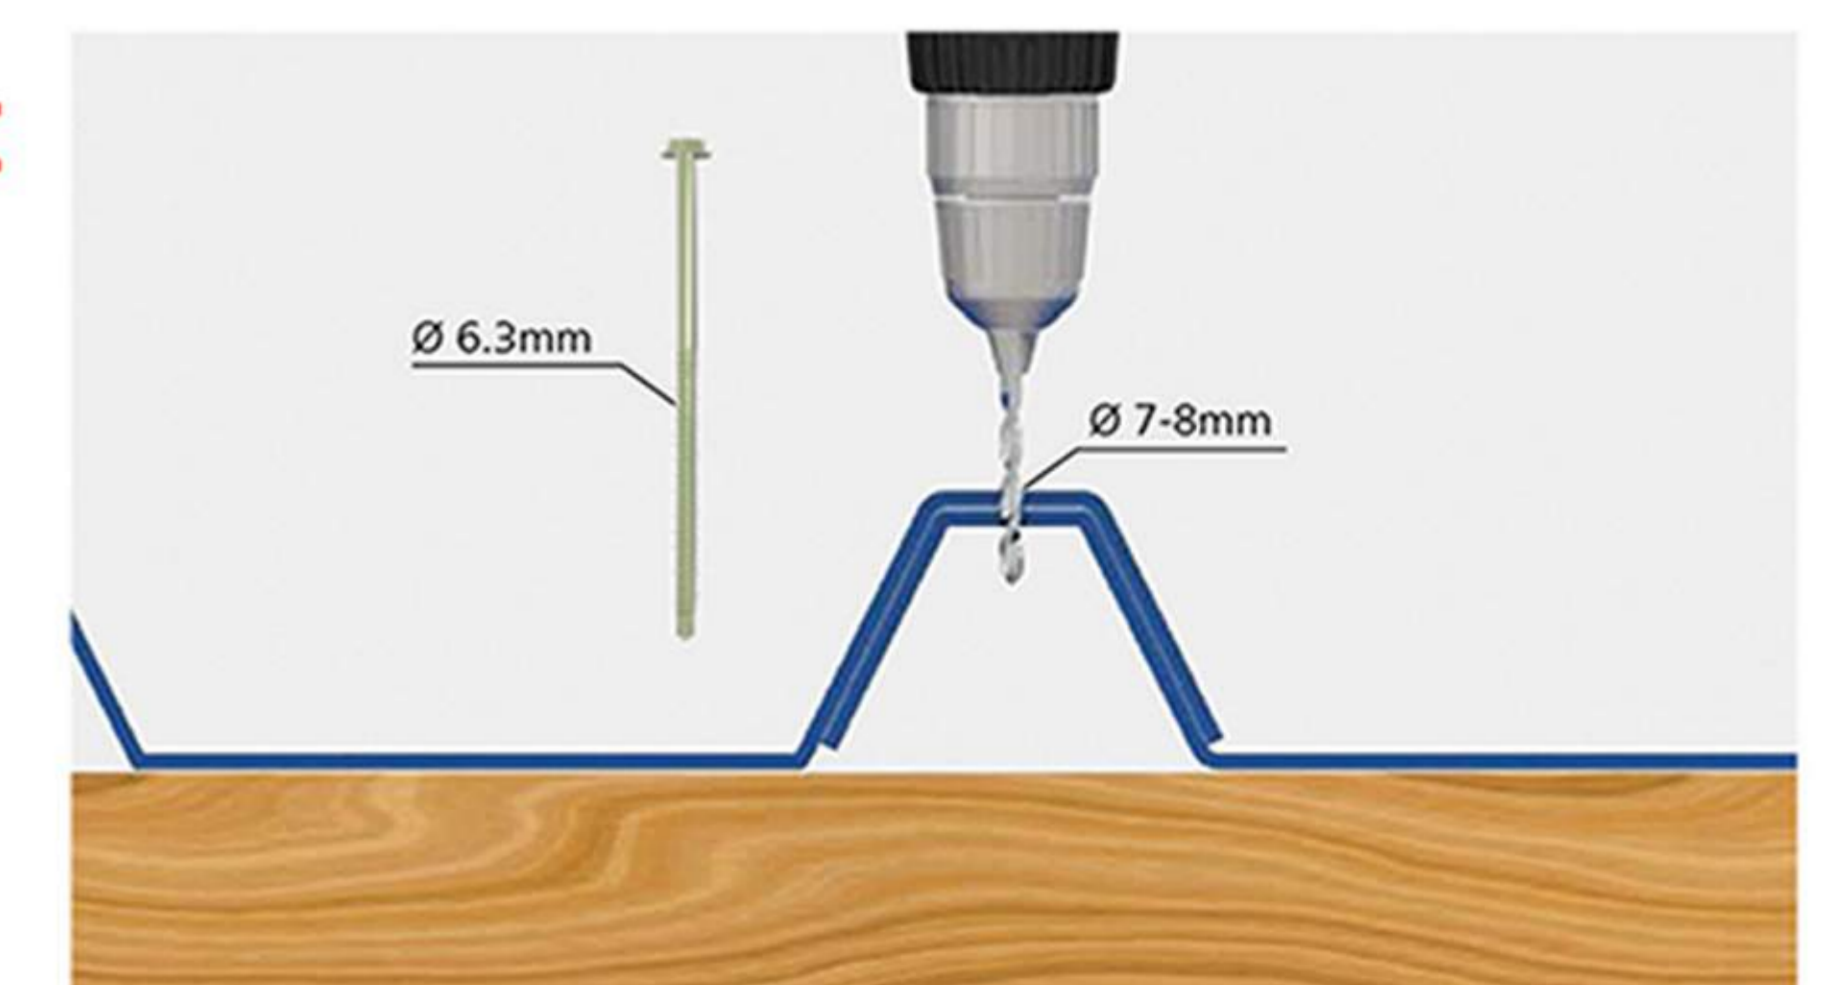

## APPLICATION USAGE

- Resorts -Warehouse -Factories
- Farm Houses -Fences -Wall Cladding


**UPVC ROOF SHEET**  
**CORRUGATED**

SIZE	PRICE
720 x 2440 x 1.5mm	<b>P 860.00</b>
720 x 3050 x 1.5mm	<b>P 980.00</b>
720 x 3650 x 1.5mm	<b>P 1120.00</b>
720 x 4260 x 1.5mm	<b>P 1360.00</b>



**POLY PVC ROOF SHEET WITH**  
**UV COATING SINGLE LAYER**  
**TRAPEZOIDAL**

SIZE	PRICE
940 x 2440 x 2.5mm	<b>P 1,800.00</b>
940 x 3050 x 2.5mm	<b>P 2,200.00</b>
940 x 3650 x 2.5mm	<b>P 2,800.00</b>
940 x 4260 x 2.5mm	<b>P 3,200.00</b>

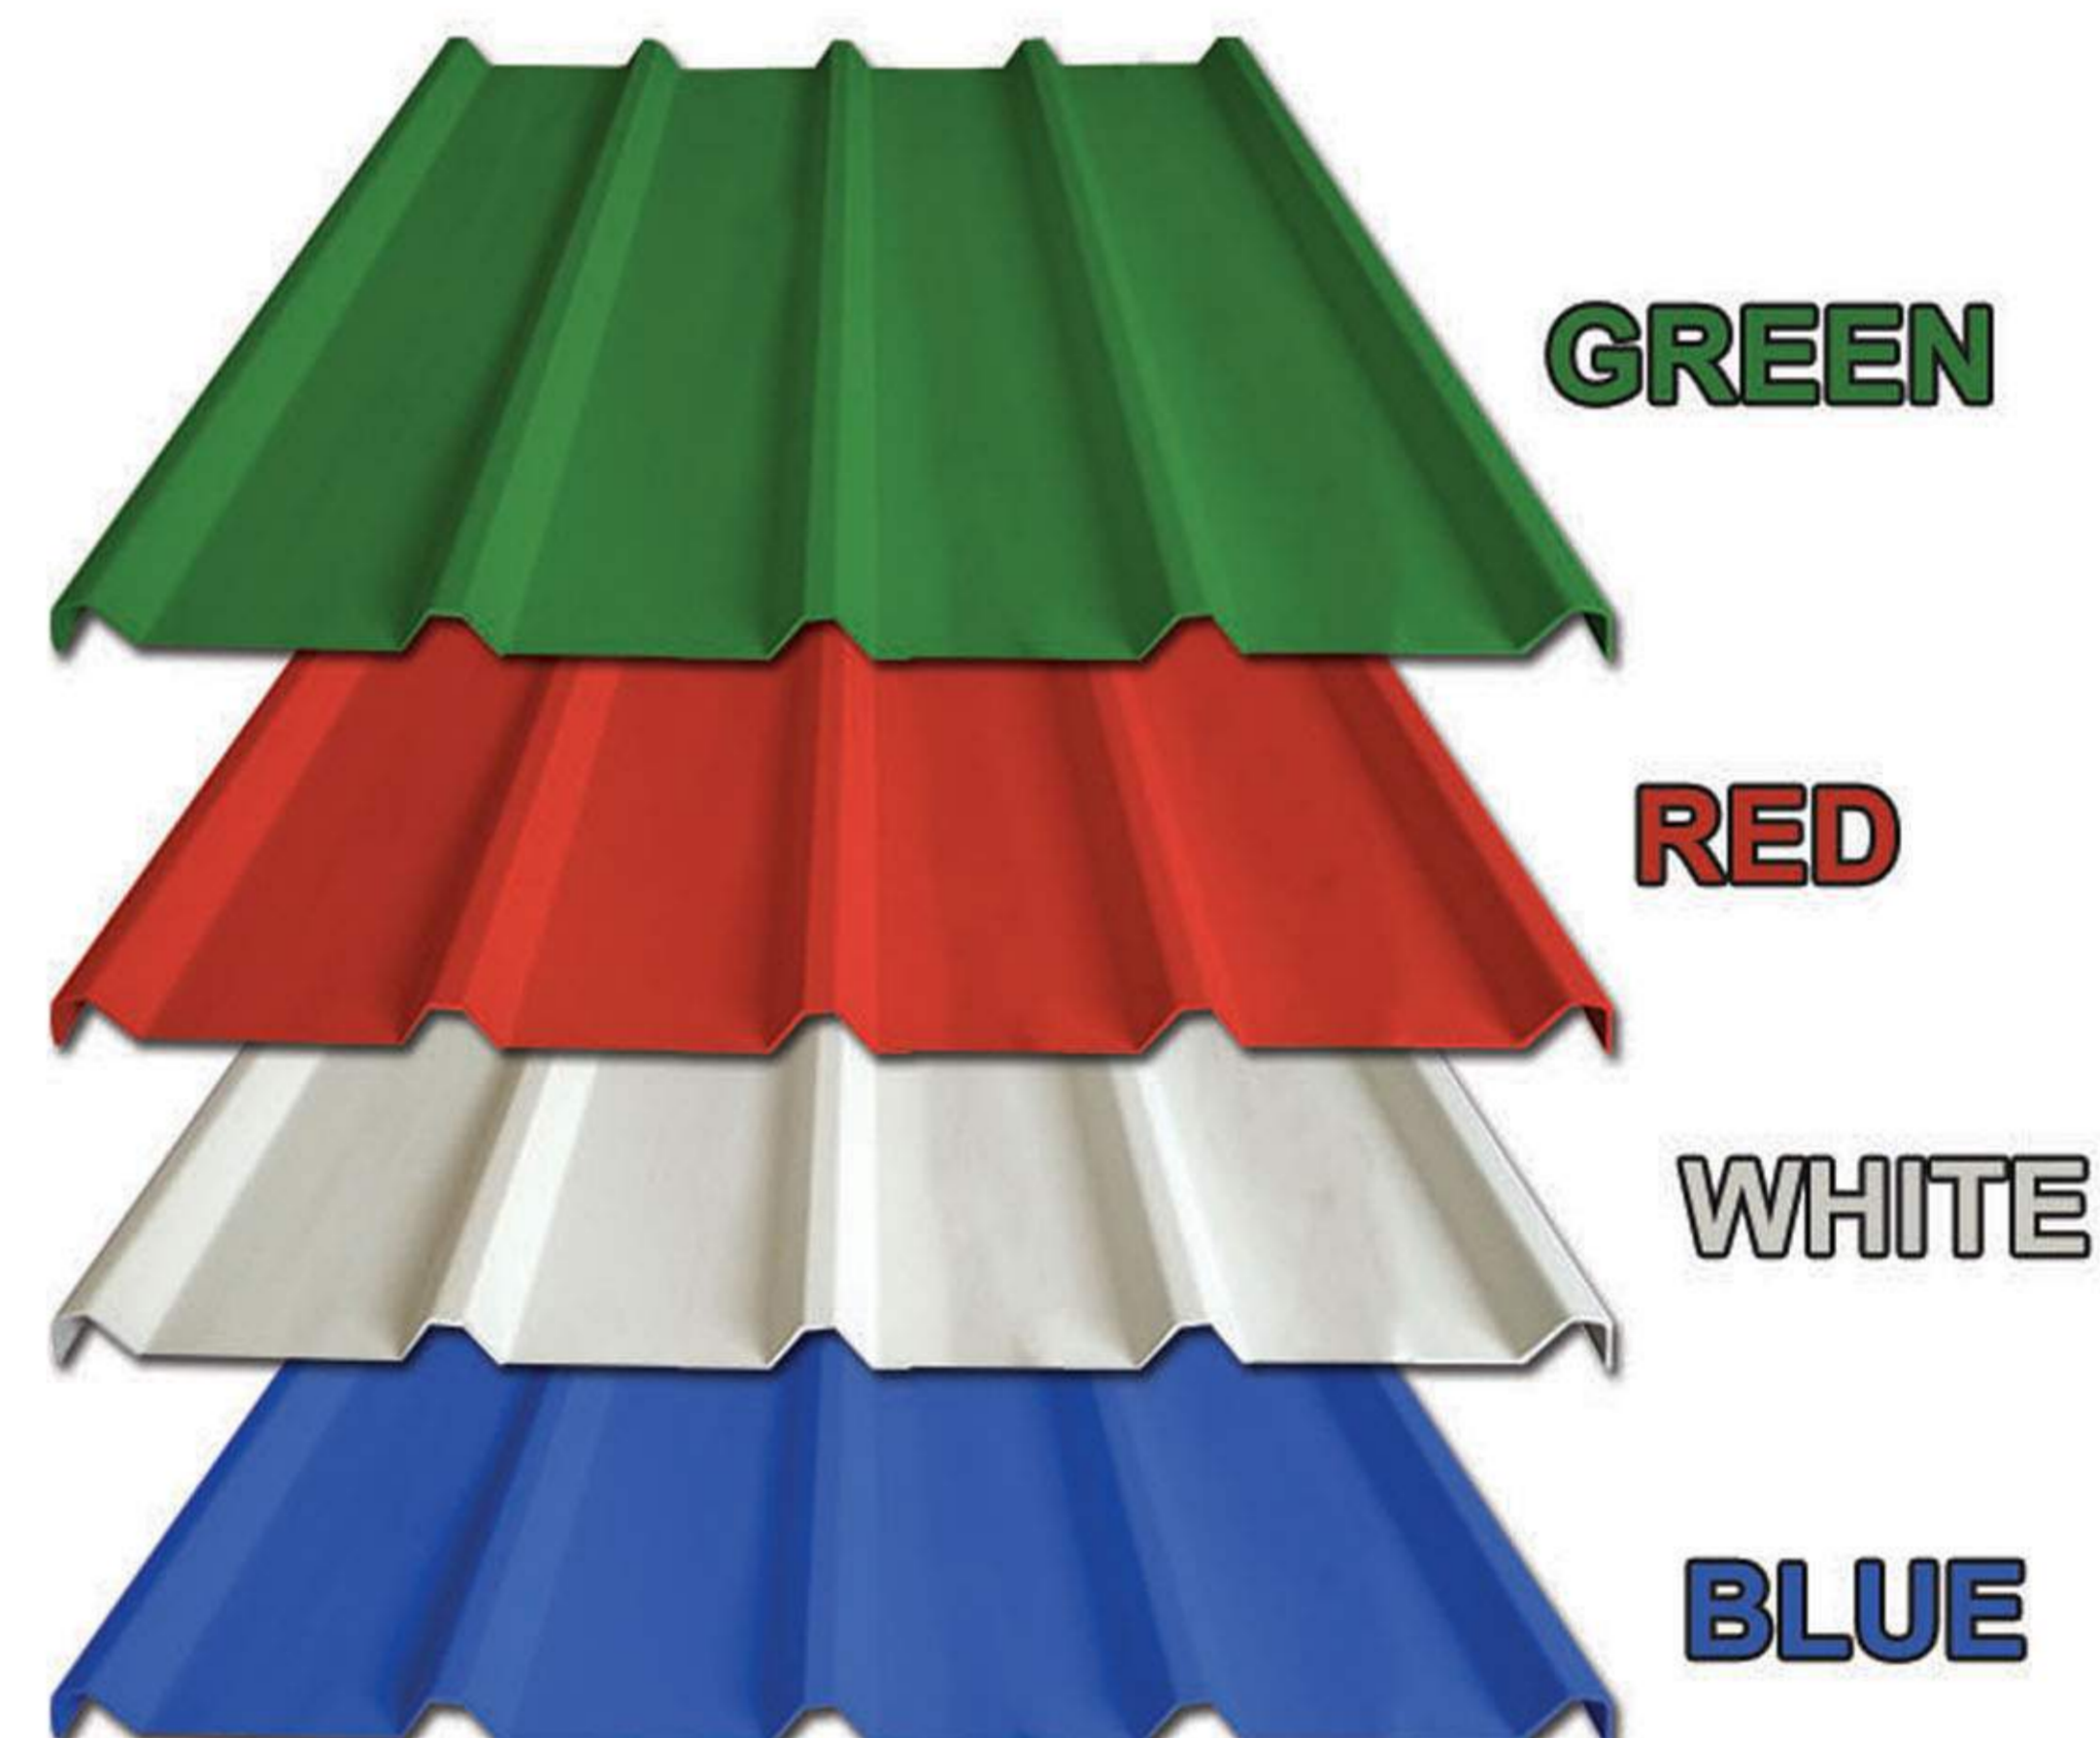

**J-BOLT**

SIZE	PRICE
M6 x 70 x 50 x 20 Minimum: 1 Box = 800 sets	<b>P 3.50 / SET</b>
M6 x 100 x 50 x 20 Minimum: 1 Box = 500 sets	<b>P 4.00/ SET</b>




**Polly PVC Roof Sheet with UV coating-Single Layer**

**Size:**

- 940x2440x2.5mm (8ft)
- 940x3050x2.5mm (10ft)
- 940x3650x2.5mm (12ft)
- 940x4260x2.5mm (14ft)

**Price:**

- 1,800 Php
- 2,200 Php
- 2,800 Php
- 3,200 Php

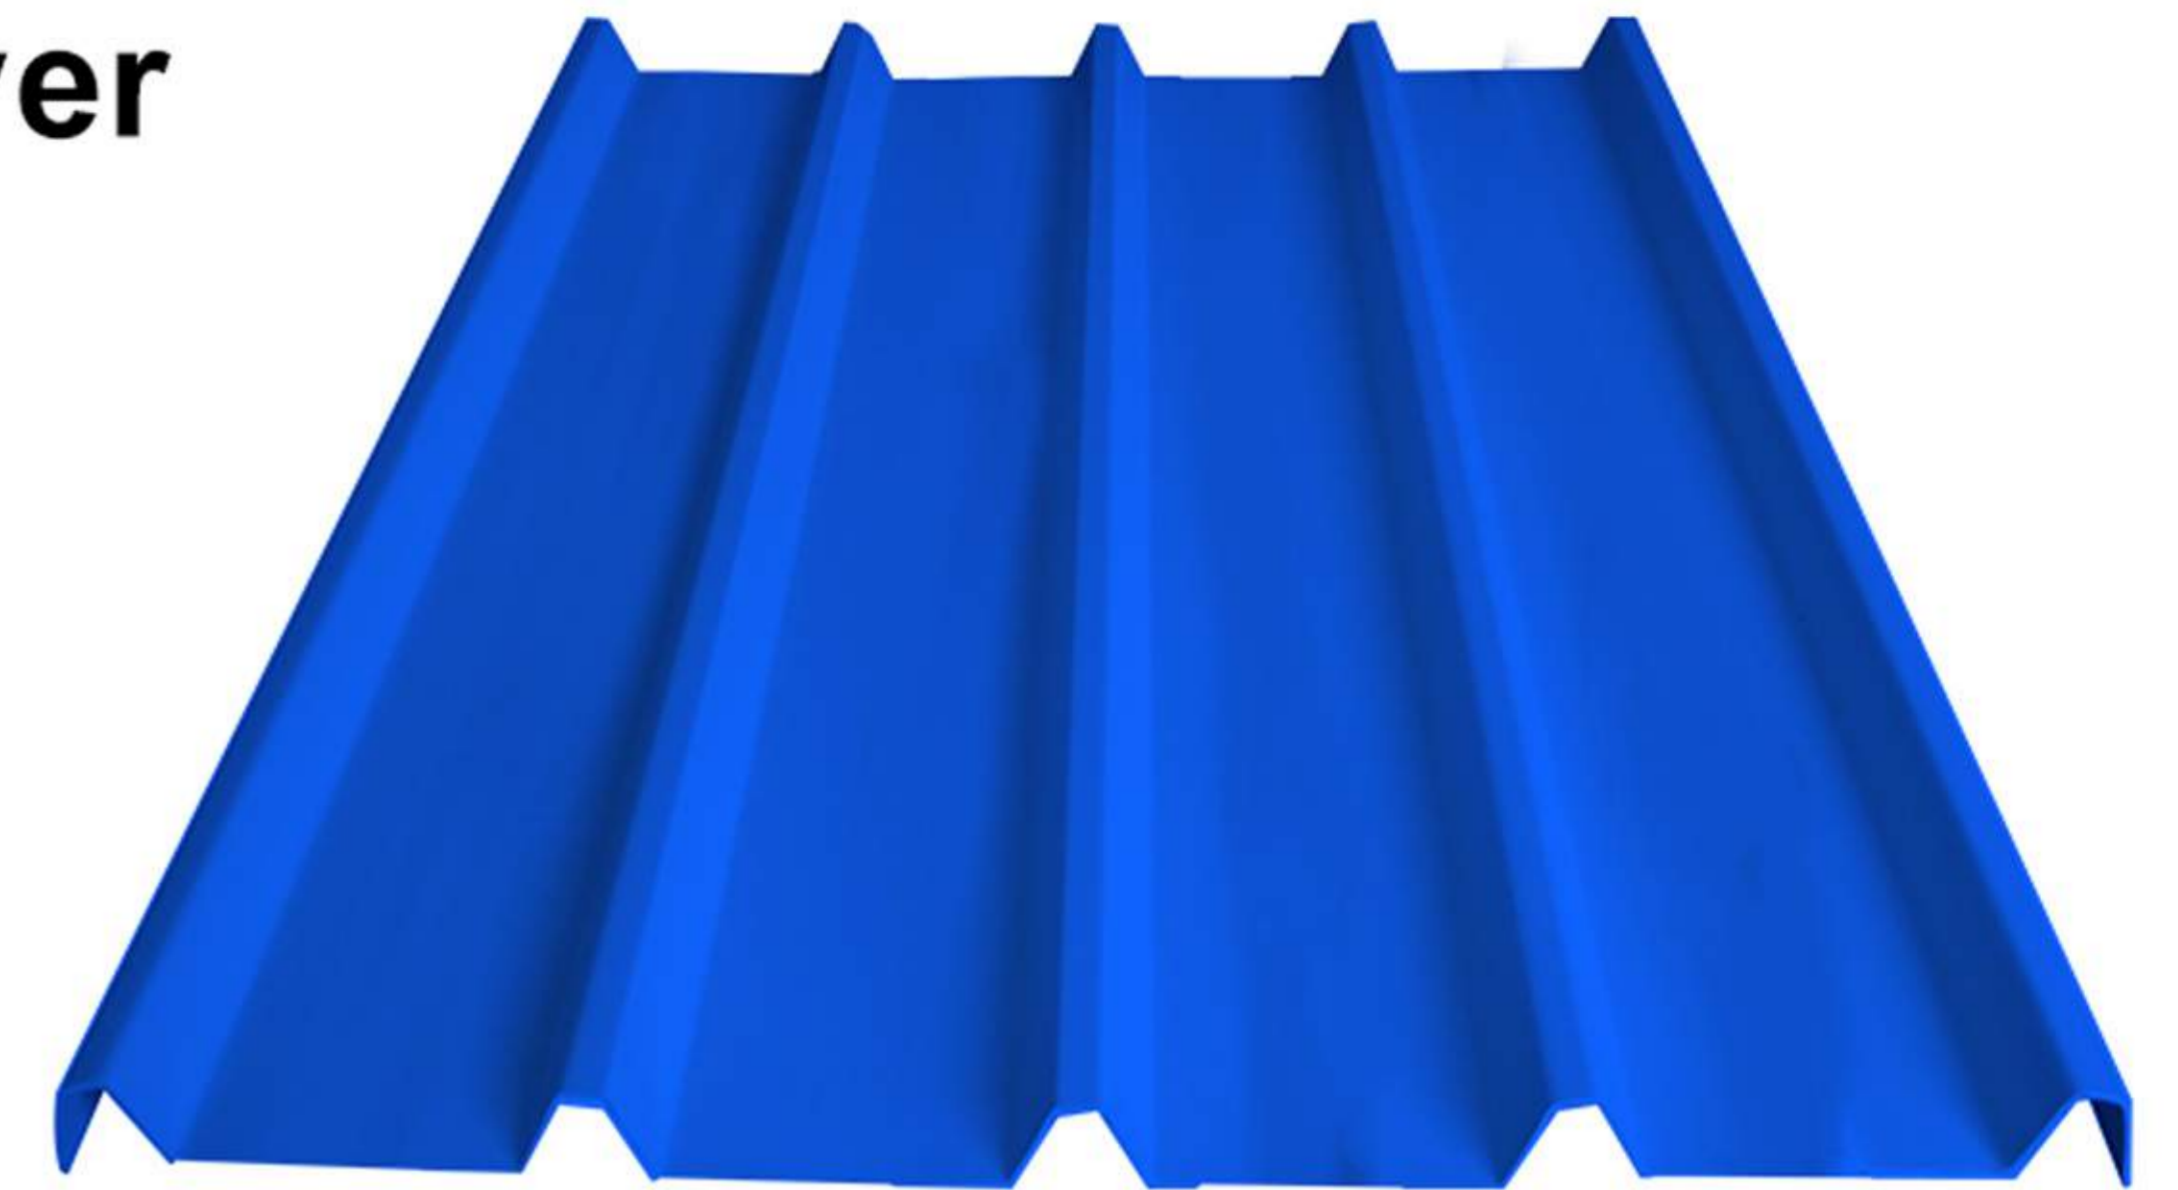


**AVAILABLE COLORS:**

Blue and Red Orange

**Industrial Exhaust Fan:**

Technique parameter		50" Fan
Diameter Blades	mm	1270
RPM of Blades	RPM	437
Voltage	V	380
Current	A	2.8
Power	Kw	1.1
RPM of Motor	RPM	1800
Capacity	CFM	43080
Noise	dB	≤65

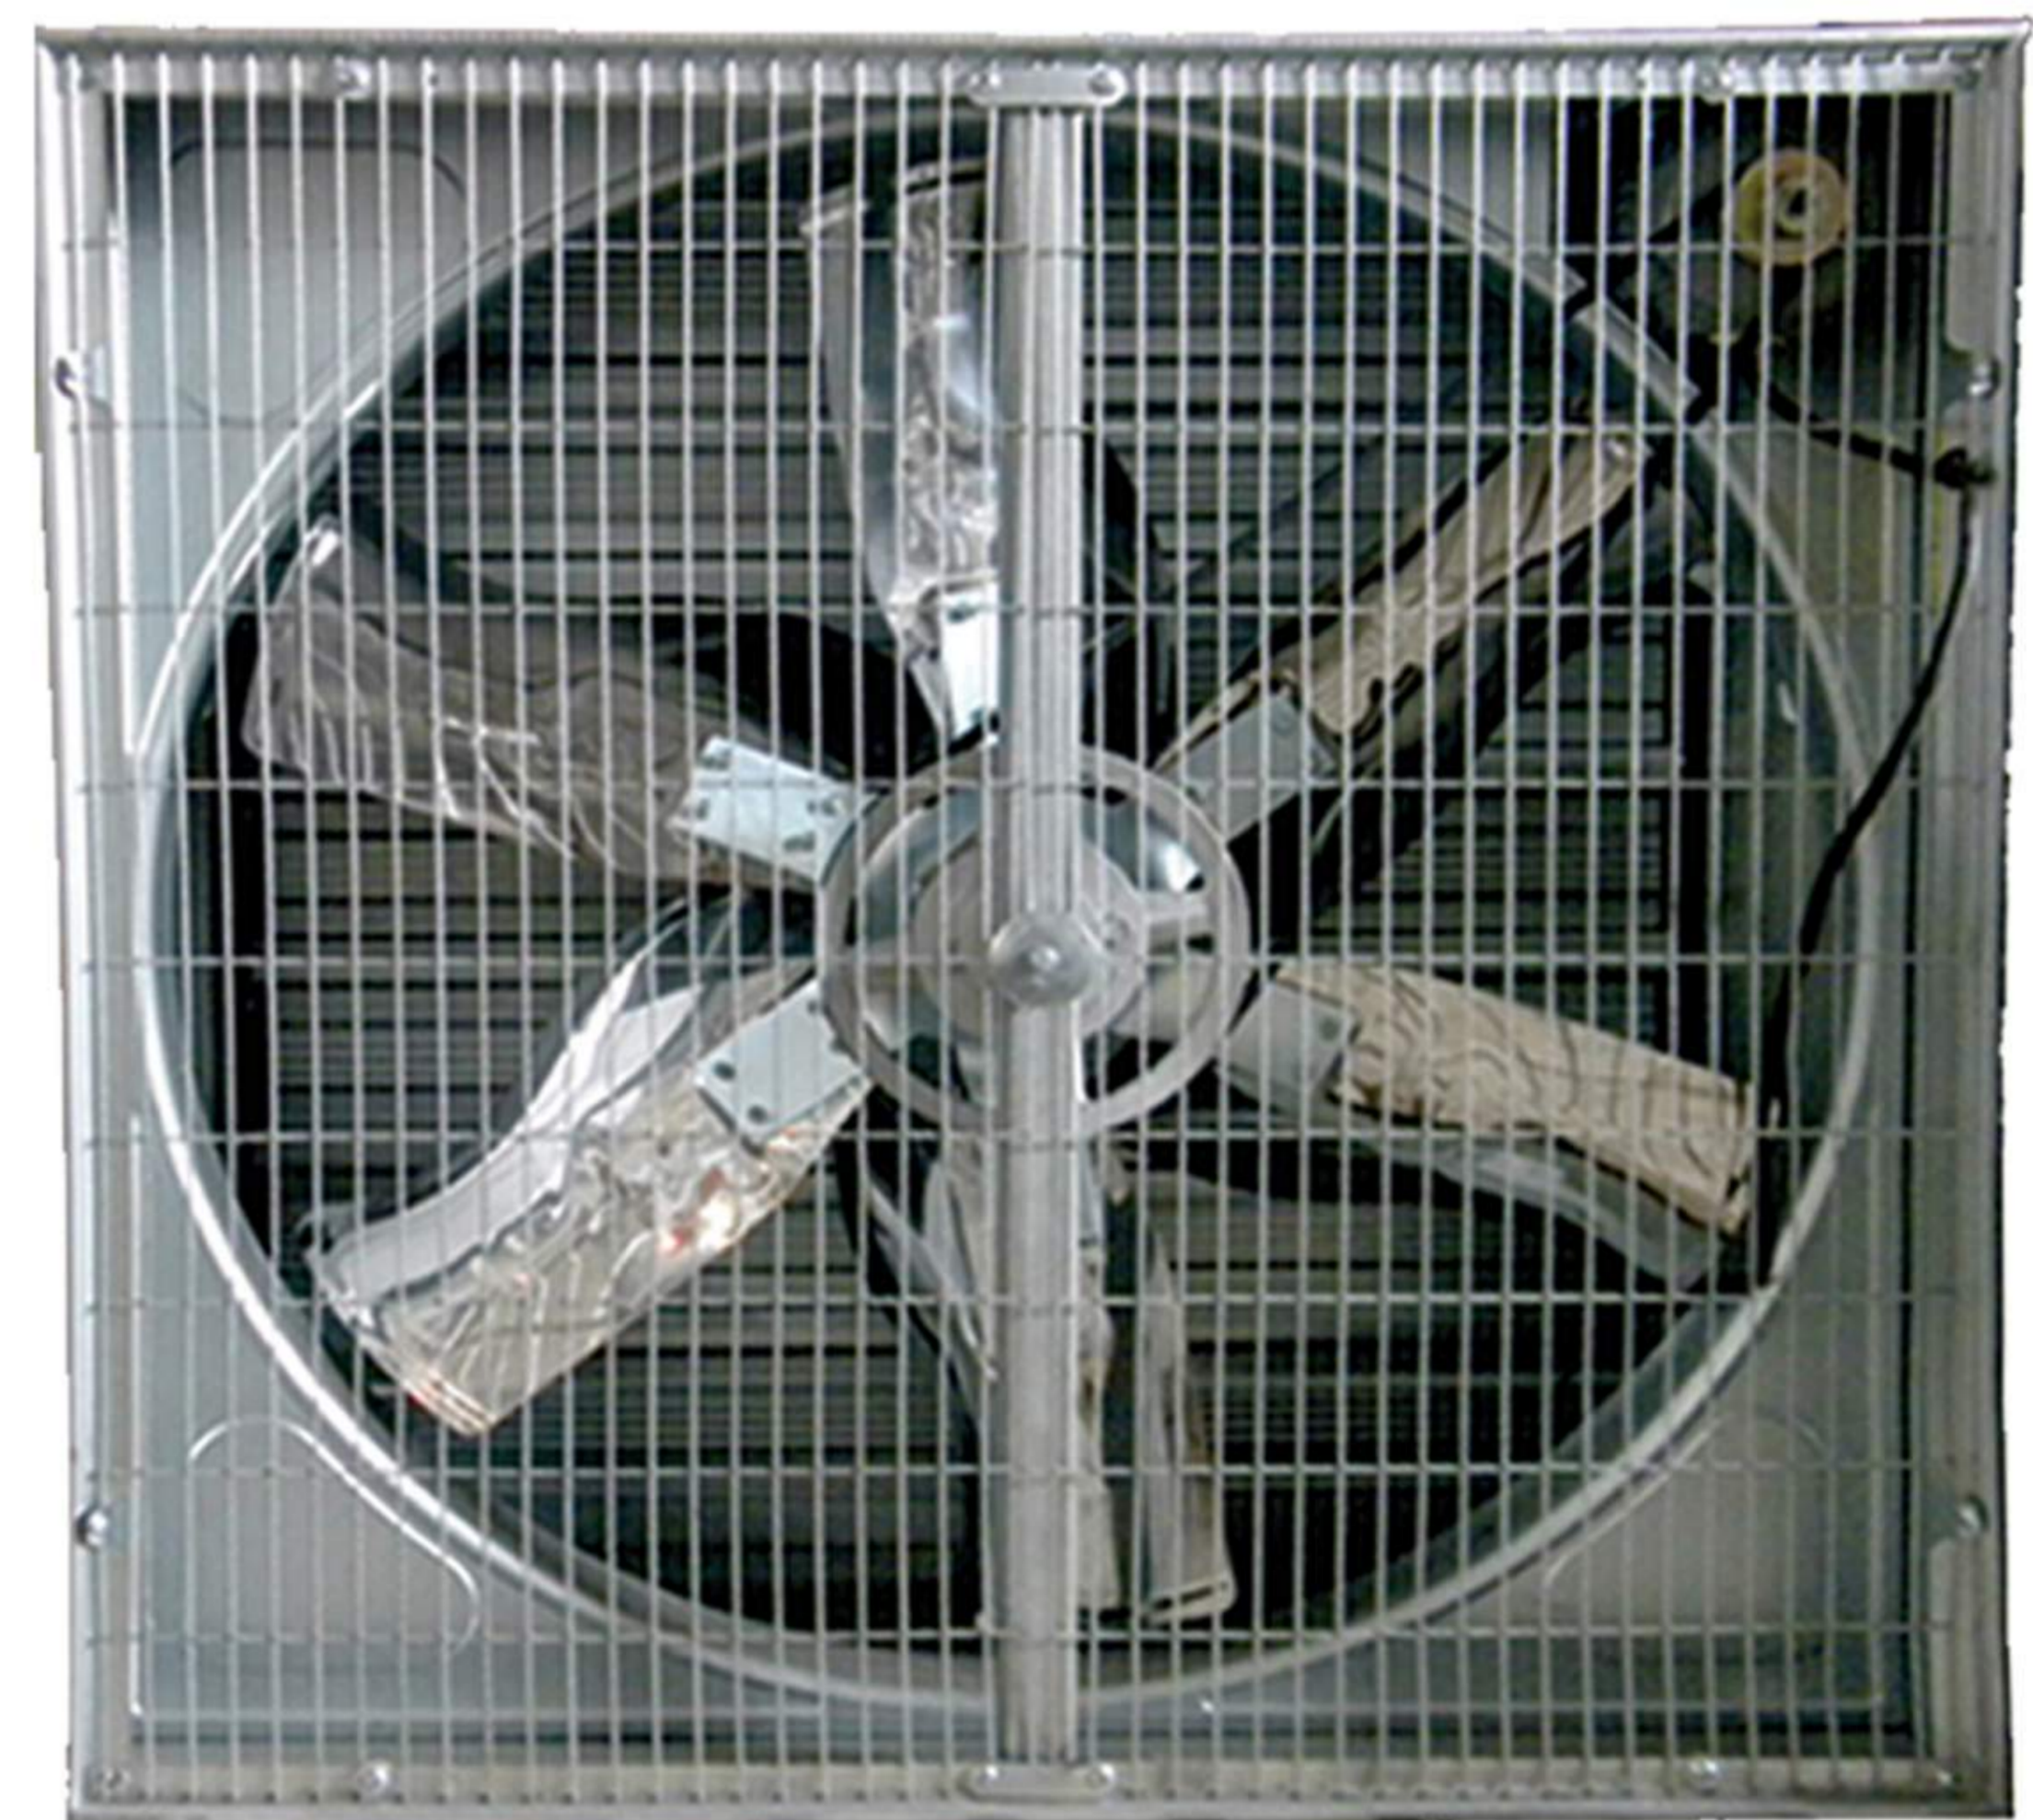

**PRICE: Php. 29,000**

**Air Vent**

SIZE	COLOR	PRICE	DISCOUNT
26cm x 122cm (Staright type)	VG,WB,Wengue/DK Brown	₱ 385.00	Net
60cm x 30cm (Staright type)	VG,WB,Wengue/DK Brown	₱ 320.00	Net
76cm x 30cm x 76cm (L-type)	VG,WB,Wengue/DK Brown	₱ 396.00	Net
60cm x 26cm x 60cm (L-type)	VG,WB,Wengue/DK Brown	₱ 318.00	Net